


DULUTH TIMBER COMPANY

LOGGING THE
INDUSTRIAL FOREST®

Founded in 1985 by Max Taubert
Timber yards in Duluth, MN and Edison, WA

phone: (218) 727-2145
fax: (218) 727-0393

email: info@duluthtimber.com
web: www.duluthtimber.com

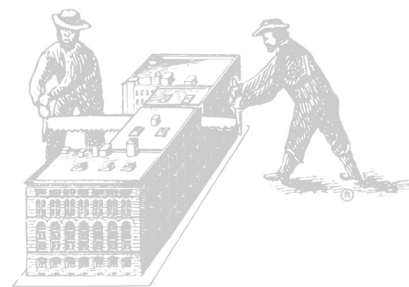

Engineered Flooring Rough-Sawn Plank Douglas Fir

>PRODUCT DESCRIPTION

Our Rough-Sawn Plank Engineered Douglas Fir Flooring showcases mixed-grain wood with rustic, rough-sawn surface texture. Available as semi-custom product only, each run is unique. Rough sawn faces of antique beams and boards are carefully selected for appearance and character, then hand-layed up and bonded to precision-cut engineered base. This rough-sawn, sanded surface features grain variation and past-life character – true story boards. Available pre-finished or unfinished. Wear layer is solid reclaimed Douglas fir (*Pseudotsuga menziesii*), good for several refinishing cycles. Perfect for installation over radiant heat.

>SOURCE

Heavy timber and lumber from dismantled warehouses, factories, etc. across North America. All original trees were old-growth, harvested from the Pacific Northwest in the early 20th century. Grown, sawn, built, deconstructed & remilled in America. Underlayer of FSC-certified hardwood plywood. Fabricated by an FSC-certified company in Minnesota.

>COLOR TONES

Rose, blush, honey and brown tones for rich story-boards under foot.

>GRAIN PATTERN

Mixed grain floors will have both flat sawn and vertical sawn boards. Some individual boards will contain both grain orientations.

>CHARACTER

Small to medium sized knots, tight and mostly checked. Expect nail holes, nail stains and other signs of this old wood's previous life.

>MILLWORK

Rough-sawn and sanded, precision-cut tongue and groove, micro-bevel edge and end-matched.

>BASE

5/8" of plywood. No added formaldehyde. Lifetime structural warranty. Products pass NWFA* water soak tests for durable glue bonds.

>DIMENSIONS

3/4" overall thickness with 1/4" thick wear layer; custom widths; random lengths 2' - 8'.

>FINISH

Optional pre-finish, standard is aluminum oxide UV-cured coating. Call for other finish options. Also available unfinished. 25-year finish warranty.

>CONTINUED

**>p2
Engineered Flooring
Rough-Sawn Plank Douglas Fir**

>PRICING

Please call or fax for a price quote.

>LEAD TIME

Approximately 3 weeks; more is always appreciated.

>INSTALLATION

For all flooring, we suggest you order a minimum 5% extra allowance and schedule delivery to the site at least two weeks prior to laying the floor. Flooring should be laid as per install guidelines of the National Wood Flooring Manufacturers Association (NOFMA).

>CERTIFICATION / LEED*

Certified as 'FSC-Mixed' through standards set by the Forest Stewardship Council (SCS-COC-002432C). Recycled wood products like this one can contribute to various LEED® credits, including Material & Resources. CSI Division 9-Finishes.

*CSI = Construction Specification Institute

*FSC = Forest Stewardship Council

*LEED = Leadership in Energy and Environmental Design

*NWFA = National Wood Flooring Association

Specifications are subject to change. **Call for quotes or samples.**
Photos and installation gallery online at www.duluthtimber.com