

# DULUTH TIMBER COMPANY

LOGGING THE  
INDUSTRIAL FOREST


Founded in 1985 by Max Taubert  
Timber yards in Duluth, MN and Edison, WA

phone: (218) 727-2145

fax: (218) 727-0393

email: info@duluthtimber.com

web: www.duluthtimber.com

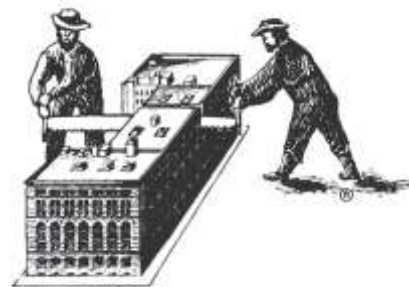

## Engineered Flooring Mixed Grain Douglas Fir

### ›PRODUCT DESCRIPTION

Our Mixed Grain Engineered Douglas Fir Flooring offers the best of both worlds: high-character reclaimed Douglas fir wear layer bonded to precision-cut engineered base. This smooth-sawn, sanded surface features grain variation and first-use character – true story boards. Standard widths are 2.75", 4.5", and 8.5". Custom widths available for an additional charge. Comes pre-finished or unfinished. Wear layer is 1/4" of solid reclaimed Douglas fir (*Pseudotsuga menziesii*), good for several refinishing cycles. 9 Ply Baltic Birch plywood base. Perfect for installation over radiant heat.

### ›SOURCE

Manufactured from heavy timber and lumber from dismantled warehouses, factories, etc. across North America. All original trees were old-growth, harvested from the Pacific Northwest in the early 20th century. Grown, sawn, built, deconstructed & remilled in America

### ›COLOR TONES

Rose, blush, honey and brown tones for rich story-boards under foot.

### ›GRAIN PATTERN

Mixed grain floors will have both flat sawn and vertical sawn boards. Some individual boards will contain both grain orientations.

### ›CHARACTER

Small to medium sized knots, tight and mostly checked. Expect nail holes, nail stains and other signs of this old wood's previous life.

### ›CRACKED FACE FLOOR

Checks and holes filled with epoxy, tinted black if requested. This is our unique brand you will find nowhere else.

### ›MILLWORK

Smooth-sawn and sanded, precision-cut tongue and groove. Pre-finished or natural patina floors have a micro- bevel edge.

Also available with surface wire brushed to slightly raise grain creating a unique timeless texture

### ›BASE

1/2" Baltic birch 9 ply hardwood plywood. Products pass NWFA\* water soak tests for durable glue bonds.

### ›DIMENSIONS

3/4" overall thickness with 1/4" thick wear layer;  
2.75", 4.5" and 8.5" widths;  
Random Lengths 2' - 8'.  
12" square edge engineered plank.

### ›FINISH

Optional pre-finish, water based or oil based.  
Call for other finish options. Also available unfinished.

### ›PRICING

\$9-\$14/ sq ft. Please call for a quote.

>continued

› LEAD TIME

Please allow 4 weeks minimum. Add two weeks per 1000 sq. ft.

› INSTALLATION

For all flooring, we suggest you order a minimum 5% extra allowance and schedule delivery to the site at least two weeks prior to laying the floor. Flooring should be laid as per install guidelines of the National Wood Flooring Manufacturers Association (NOFMA).

› LEED\*

Recycled wood products like this one can contribute to various LEED® credits, including Material & Resources.

\*CSI = Construction Specification Institute

\*LEED = Leadership in Energy and Environmental Design

\*NWFA = National Wood Flooring Association

Specifications are subject to change. **Call for quotes or samples.**  
Photos and installation gallery online at [www.duluthtimber.com](http://www.duluthtimber.com)